

Inspection Openings



Ri-Industries




Ri-Industries manufactures a wide range of inspection openings for various applications, offering easy access and high quality.

ri-industries.com.au


Precast Concrete Inspection Cover

Item	Approx mass
100mm IP	33kg
150mm IP	83kg
Product information	
<ul style="list-style-type: none"> ■ Suitable for grassed, bituminised and paved areas ■ Available in two sizes to suit 100mm or 150mm risers ■ Minimum concrete strength 32 MPa at 28 days 	

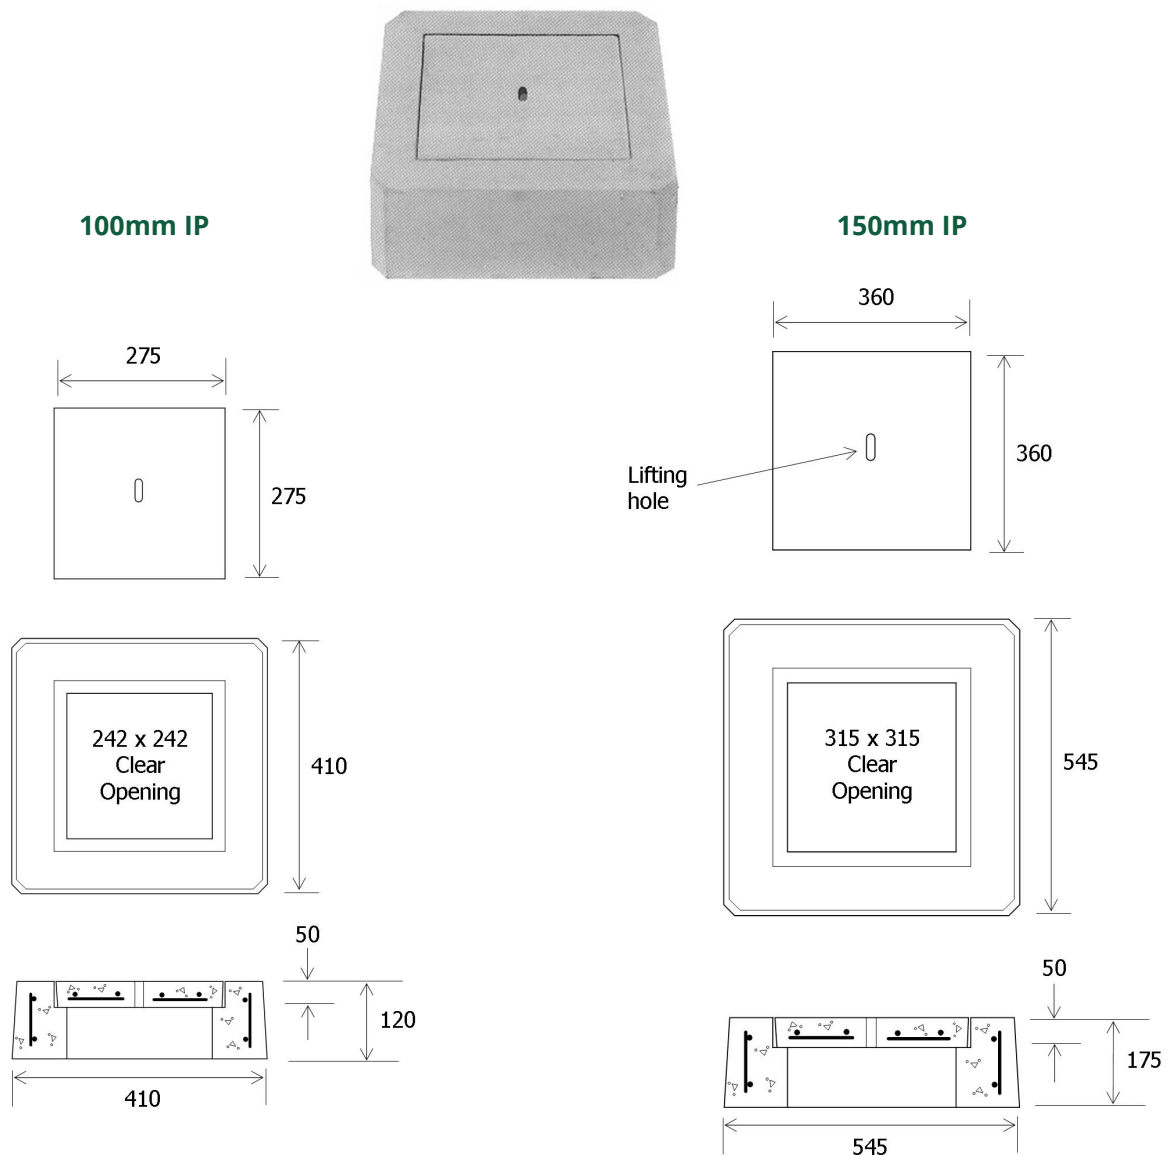

Grated Stormwater Collection Point

Item	Approx mass
Grate and frame	5kg
Product information	
<ul style="list-style-type: none"> ■ Cast iron grate and frame ■ Provides stormwater collection to 150mm drains (fits 150mm PVC collar) ■ Suitable for all paved, bituminised and concreted areas ■ Tar dipped grate and frame 	

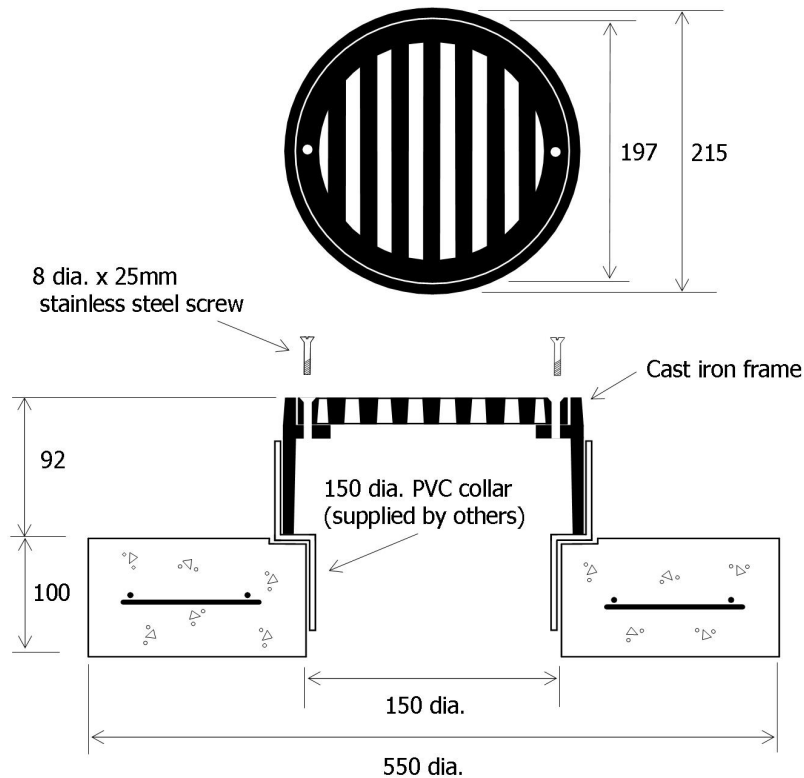


Flanged I.O. Cover And Frame

Type 1



Product information

- Suitable for use in concreted and paved areas
- Available in two sizes to suit 100mm or 150mm risers
- Cast iron frame and cover are tar dipped
- Available in bolt down
- Minimum concrete strength 32 MPa at 28 days
- Available for sewer or stormwater

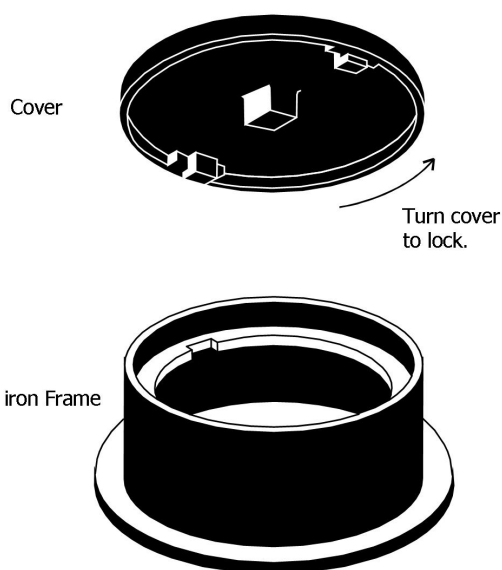

Item	Approx mass
Cover and frame	6.5kg
Support block	45kg

Item	Approx mass
Cover and frame	14.5kg
Support block	40kg

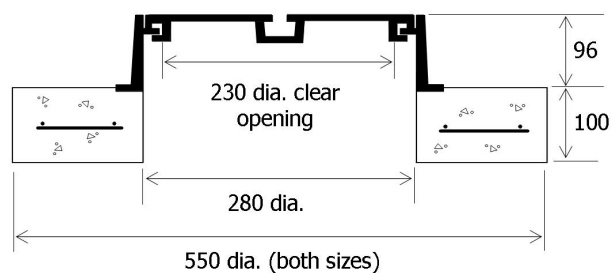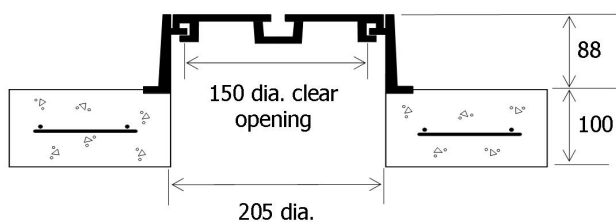


I.O. Cover And Frame

Type 2


Product information

- Suitable for use in paved, bituminised and grassed areas
- Available in two sizes to suit 100mm or 150mm risers
- Cast iron frame and cover are tar dipped
- Available in bolt down
- Minimum concrete strength 32 MPa at 28 days
- Available for sewer or stormwater

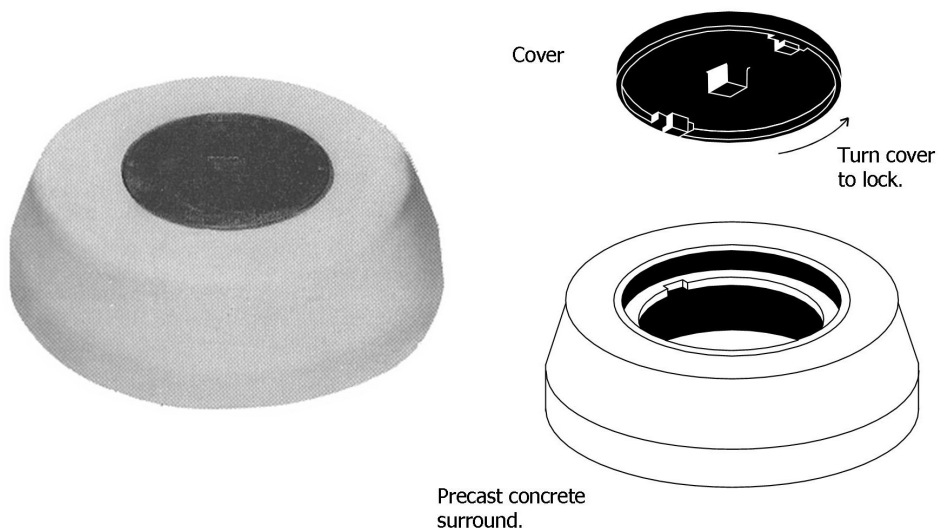



Item	Approx mass
Cover and surround	32kg

Item	Approx mass
Cover and surround	29kg

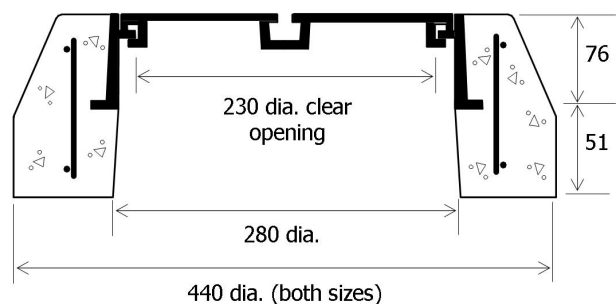

Precast Concrete Support Block

Item	Approx mass
1,000 x 700	185kg
600 x 600	100kg
Product information	
<ul style="list-style-type: none"> ■ For heavy surface installation with common effluent drains ■ Will suit both 100mm and 150mm flushing points ■ Designed to suit I.O. cover and frame type 2 (refer to Ri-Industries' data sheet E3) ■ Minimum concrete strength 32 MPa at 28 days 	

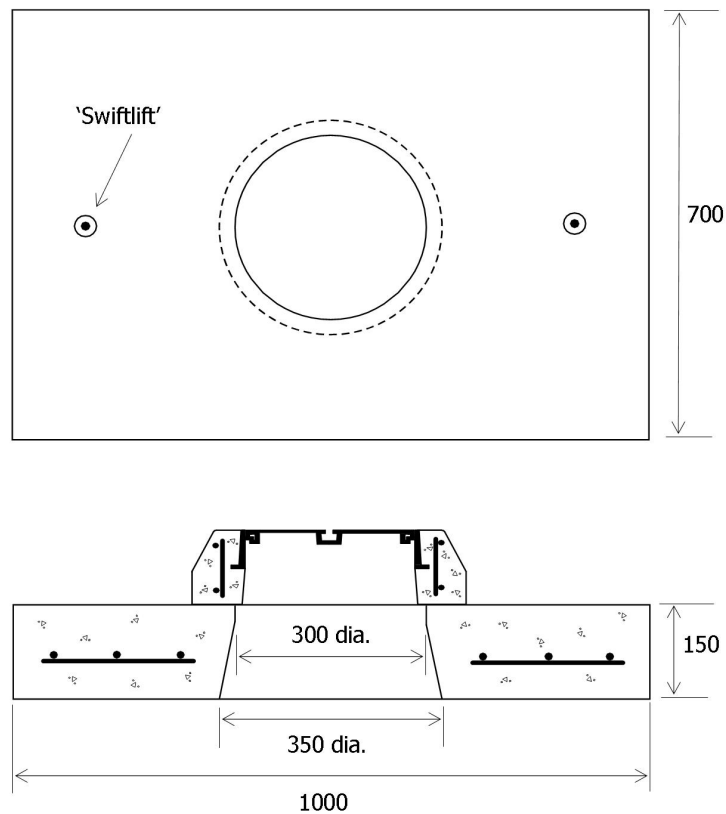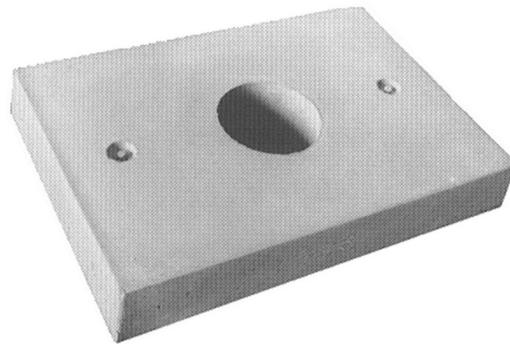

Cast Iron Covers, Grates & Frames

Cast iron grates and solid top covers are ideal for traffic and non-traffic areas such as roadways and footpaths.



Sump grates and covers are available in the following sizes:

- 300mm x 300mm
- 450mm x 450mm
- 600mm x 600mm
- 900mm x 600mm
- 900mm x 900mm
- Non-standard sizes are available on request




Class D


Solid Top

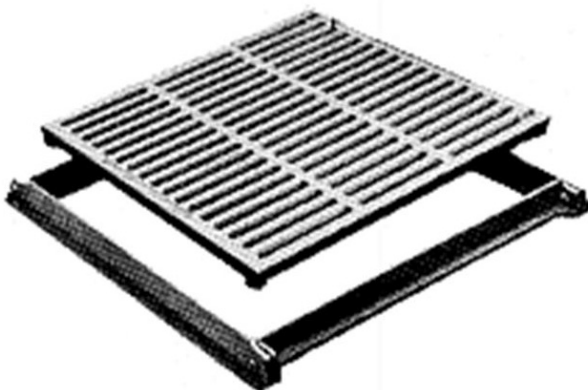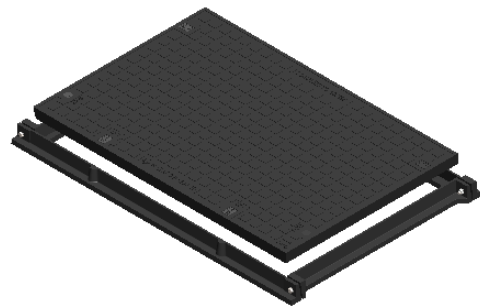


Class B

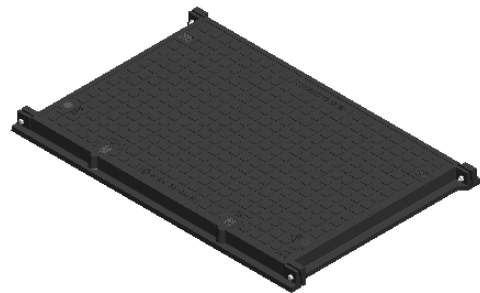

Light Duty Galvanised Grates & Frames

Item	Approx mass
300 x 300	15.5kg
450 x 450	15.5kg
600 x 600	24.5kg
Product information	
<ul style="list-style-type: none"> ■ Also available for heavy duty application ■ Hot dipped galvanised after fabrication ■ Suitable for use in concreted or bitumised areas servicing pedestrian traffic ■ Special sizes to suit other pits supplied to order 	
	

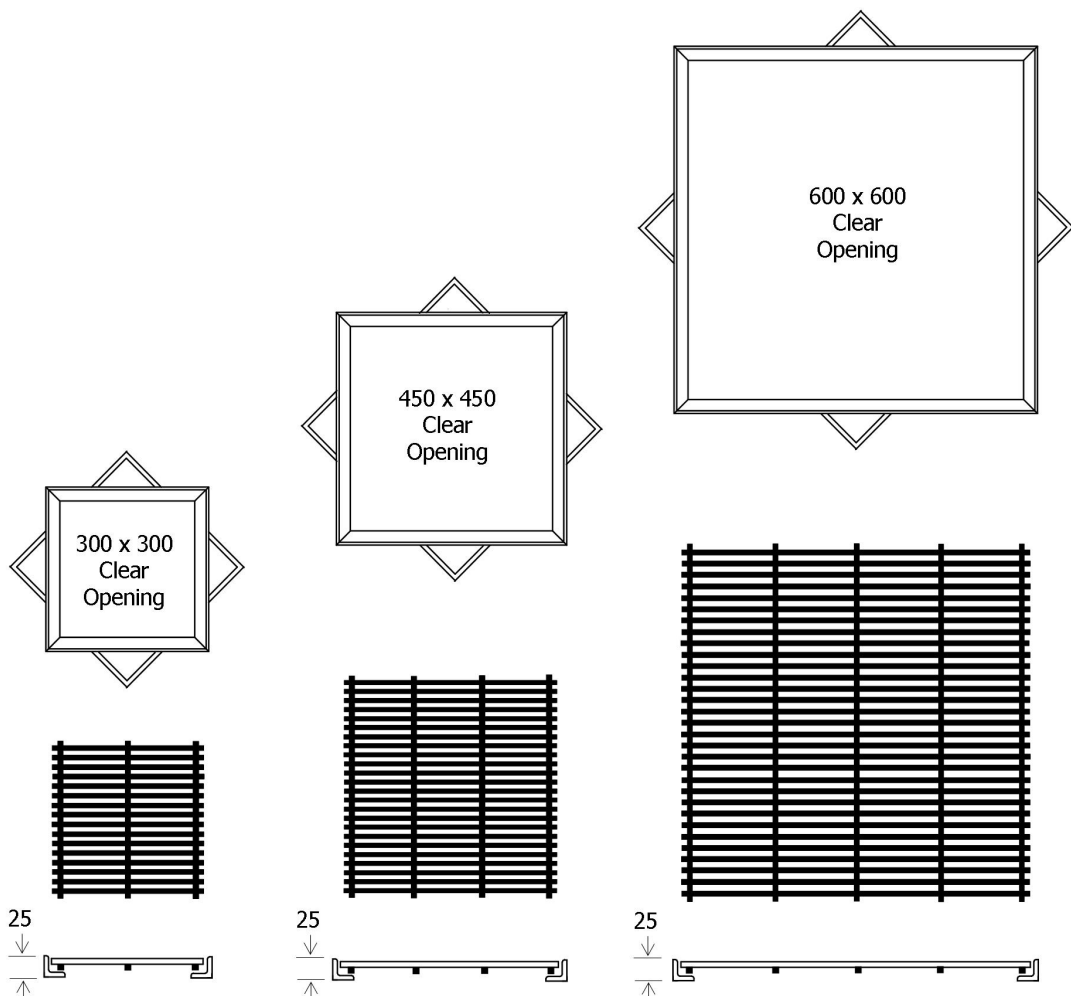



Precast Concrete 'Knock Out' Sumps

Length	Width	Depth	Approx mass
300mm	300mm	300mm	120kg
450mm	450mm	500mm	420kg
600mm	600mm	600mm	570kg
600mm	600mm	900mm	775kg

Product information

- Pre-formed to enable penetrations to be 'knocked out' with a sledge hammer at desired locations
- Available ex-stock - suitable for emergencies or tight schedules

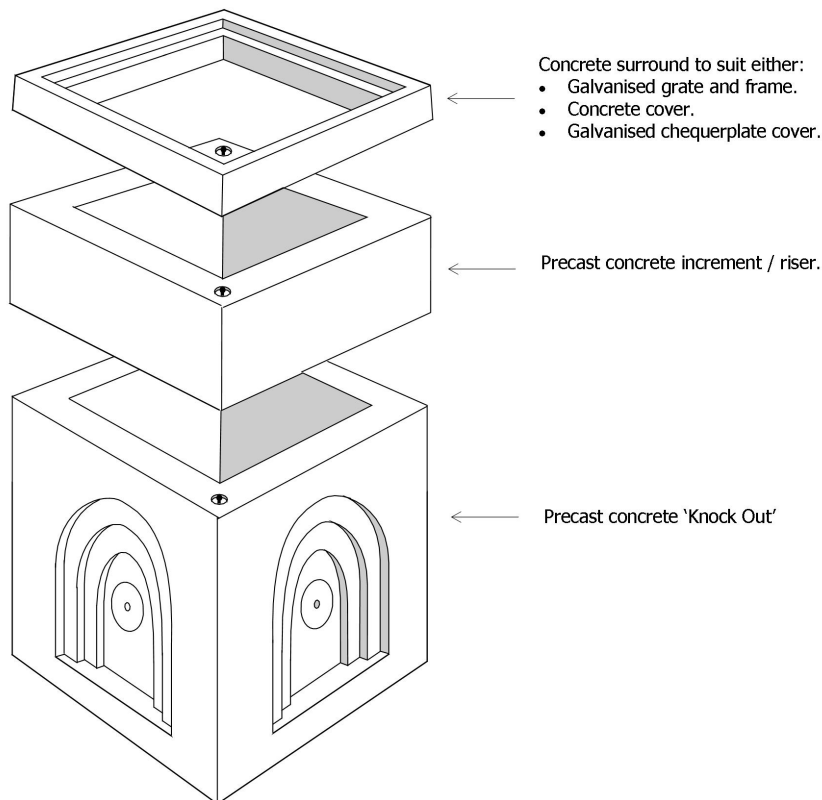

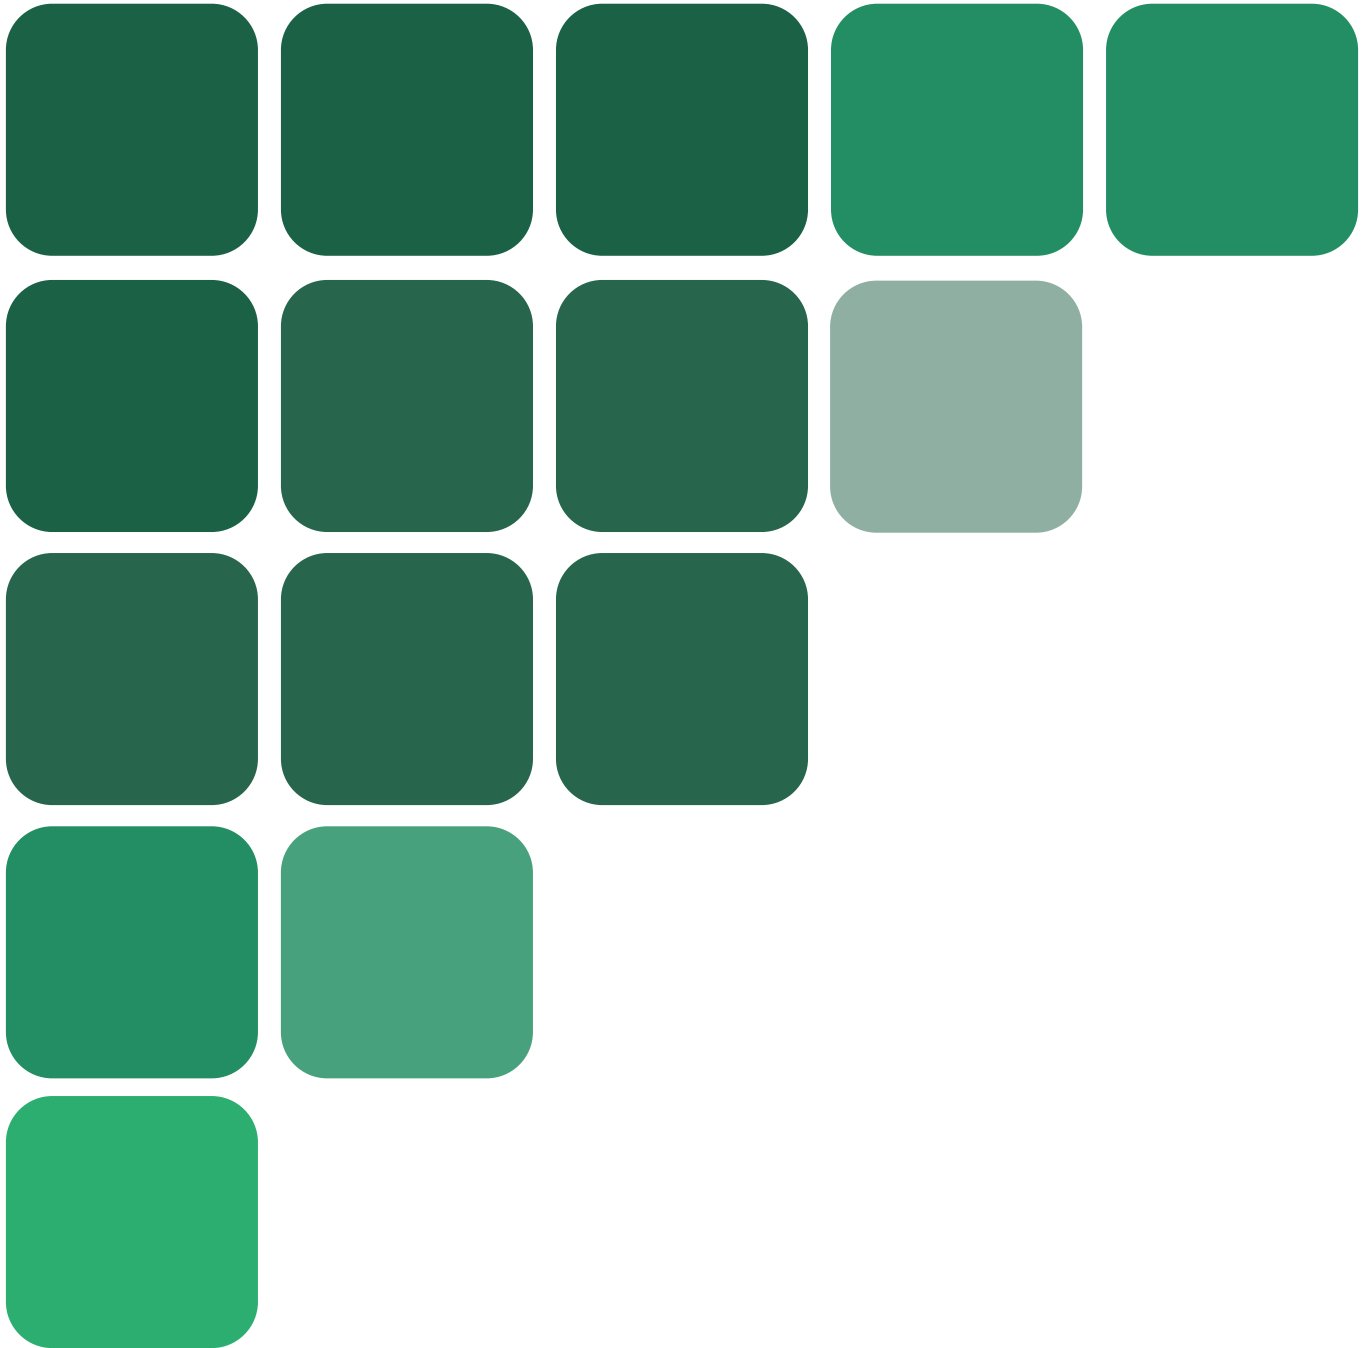

Ri-Industries

24-30 Davis Street, Wingfield,
South Australia, 5013

(08) 8444 8100
sales@ri-industries.com.au

ri-industries.com.au

ABN 81 007 647 323 | MAY 2025

