



Industries

Householders Operational Manual for Ri-Treat Waste Water Treatment System

**On the first day of occupation
please telephone the service agent listed on your Ri-Treat
unit for commissioning of the new system, alternatively,
call Ri-Industries on 8444 8100.**

**South Australia's leading manufacturer of pre-cast concrete products
including Ri-Treat waste water treatment, trades waste arrestors,
septic tanks and rainwater tanks**

www.ri-industries.com.au



Contents

Important notes	2
General information	3
Start up	4
Alarms	5
Guidelines for use	6
Suitable cleaning products	7
Electrical and circuit diagrams	8
Suitable plants	9



**Leaders in pre-cast concrete products
that enhance the environment**

Ri-Industries was established 1947. We are totally committed to achieving excellence in all that we do, which is why South Australian residents and businesses repeatedly buy our products and regularly recommend us.

www.ri-industries.com.au

618 South Rd, Angle Park, SA 5010
P (08) 8444 8100 F (08) 8268 2335

Important notes

- On the first day of occupation please telephone the service agent for commissioning of the new system. Service agent details are located on the housing of your Ri-Treat unit, alternatively, call Ri-Industries on 8444 8100.
- The maintenance and operation of the Ri-Treat waste water treatment system is subject to regulations under state law. The unit should be serviced by an authorised service agent.
- Any warranty work must be completed by the service agent.

General information

The Ri-Treat Waste Water Treatment System will operate effectively for many years provided that the system is used in the correct manner, and that the system is properly maintained.

Under South Australian Department of Health law the household is required to have the unit serviced every three months by a South Australian Department of Health certified agent to ensure consistent performance of the system. Due to its design and depending upon the manner in which the system is used, the Ri-Treat Waste Water Treatment System will require a full service only after three to five years operation.

The Ri-Treat Waste Water Treatment System shall operate continuously without problems provided that the system is correctly operated. The most likely problem to occur with this system over time is likely to be the result of:

- overloading with solids waste
- overloading with waste water
- contamination of the system

There are a number of possible causes of overloading the system. The following materials should never be allowed to enter into the system:

- Concentrated or excessive amounts of bleaches, detergents and disinfectants
- Rags and sponges
- Excessive amount of toilet paper
- Any printing paper or newspaper
- Condoms or tampons / sanitary pads
- Food scraps, gravel, dirt or stones
- Oils, grease (a grease trap is required), paints and solvents

'Excessive' use of water can also adversely effect the performance of the system. This can particularly be the case where there has been excessive flow of water over a number of weeks. Check with the householder for the possibility of a leaking tap, or for a storm water pipe connected to the system by filling the gutters with water.

If you have any questions as to the suitability of the Ri-Treat Wastewater Treatment System, consult your local service agent or Ri-Industries for further advice.

Start up

The “service agent” will commission the unit when contacted and general use is required. Generally the procedure is to ensure that the tank is $\frac{3}{4}$ full of water and all pumps are operational. The system should be fully established within two weeks, with clean water discharging to the irrigation system.



Alarms

The system will be self maintaining unless problems arise from **overloading** or **contamination**. Normally the alarm system will only activate if there is a failure of either the aeration pump, or the irrigation pump. An alarm reset switch is normally located indoors. After resetting the alarm, do not ignore the problem, as an alarm is an indication of a problem with the system, and immediate action is required. If problems do occur the following list may help:

Problem	Remedy
Air pump does not operate - alarm operates	Reset the alarm, if alarm reactivates, operate. If not check power supply to the system. If power is connected reset the circuit breaker and reset the alarm. If alarm reactivates contact your local service agent immediately.
Irrigation pump - alarm operates	Check the power system. If power is connected reset the circuit breaker and reset the alarm. If alarm reactivates contact your local service agent immediately.
Irrigation system does not spray properly	Check filter on line - clean if necessary. Check and clean faulty sprays. If further problems occur contact your local service agent immediately.

Normally the Ri-Treat Waste Water Treatment System will not need to be shut down apart from during a major service. In situations where the system is not used for up to a period of one month, the system may take some time to re-establish itself, but will eventually do so within 7 days.

If the system is to be inoperative for periods of six months or more, it is recommended that the system be shut down altogether to conserve power and prolong the service life of all components. We recommend that the unit be thoroughly washed and refilled with water to avoid the unit floating. This should be supervised by the service agent. To recommence using the unit, the system shall undergo the same startup procedure as before. Enzymes (for example Dynamic Lifter) may be used to speed up the start up. 1 or 2 cups down the toilet should reactivate this process.

Guidelines for use

Detailed below are some general guidelines for the use of irrigation for Ri-Treat Waste Water Treatment Systems.

- **At all times avoid any form of bleach, antibacterial solutions or toilet cleaners entering the system.**
- Irrigation of grassed or lawned areas should not be undertaken. This is not recommended as children may play on lawned areas and the treated water from the system is not suitable for this purpose.
- Irrigation should not be placed on areas where fruit and vegetables are grown. The treated water is not suitable to water these plants.
- Recommended plants that can be grown from the treated water are included in this document.
- The surface irrigation disposal area must be dedicated to the sole use of effluent disposal. The area must be landscaped, preferably with salt tolerant shrubs and trees and should be designed to discourage pedestrian and vehicle access.
- The surface irrigation disposal area must not be located on land subject to water logging and/or subject to flooding. The reclaimed effluent must be evenly distributed over the entire surface irrigation disposal area without spray-drift, pooling and/or run-off from the area. Where necessary, appropriate landform modification such as bounding, mounding and/or terracing to suit the proposed site, must be carried out to prevent run-off from the surface irrigation disposal area.
- No effluent shall be discharged until the surface irrigation disposal area is completed, including landscaping and planting to ensure that no pooling or runoff of reclaimed effluent occurs. Plants in the surface irrigation disposal area must be suitable for the transpiration of reclaimed effluent and be salt and nutrient tolerant.
- In accordance with legislation the surface irrigation disposal area must have at least four (4) warning signs, one on each side, clearly positioned to inform the occupants of the premises that reclaimed water is used for irrigation. These signs must be on a white background with RED lettering of at least 20mm in height and worded as follows:

**WARNING – RECLAIMED WATER
NOT SUITABLE FOR HUMAN CONTACT/CONSUMPTION**

Suitable cleaning products

At all times avoid any form of bleach, antibacterial solutions or toilet cleaners entering the system. Should any form of bleach enter the system this will cause the system to work inefficiently. The bleach will kill off all the 'good bacteria' and shall create an odour from the system. In addition should clothing be washed continually i.e. more than 2 loads at one time over a 24 hour period, then the system will not operate effectively and a possible odour may occur. It is recommended that clothing be washed over a period of time to ensure effective operation of the system.

Suitable cleaning products to use with Ri-Treat Waste Water Treatment Systems and septic tanks

- Vinegar
- Bicarbonate of soda
- Soap - in the form of washing powder, dishwashing liquid and ordinary body soap
- Biodegradable cleaning liquids

Cleaning items that should be used sparingly

- Disinfectants

Read labels for cleaning products. Beware of products that state 'septic safe' as that is not always the case. IF IN DOUBT call 1800 818 059 Ri-Industries.





Electrical and circuit diagrams

All electrical connections must be carried out by trades persons who are experienced and licensed for such work.

Within the premises switchboard, we recommend the use of an independent and dedicated circuit of 16 Amp (minimum) being serviced with its own ELCB (residual current device) to supply power to your Ri-Treat Waste Water Treatment System.

Note: Ri-Industries' alarm panels will reset automatically and are 12 volt AC powered from a transformer within the control box mounted to the top of the tank. The green light indicates that there is power to the system. Low voltage for **your safety**. Auto reset for the least inconvenience and peace of mind.

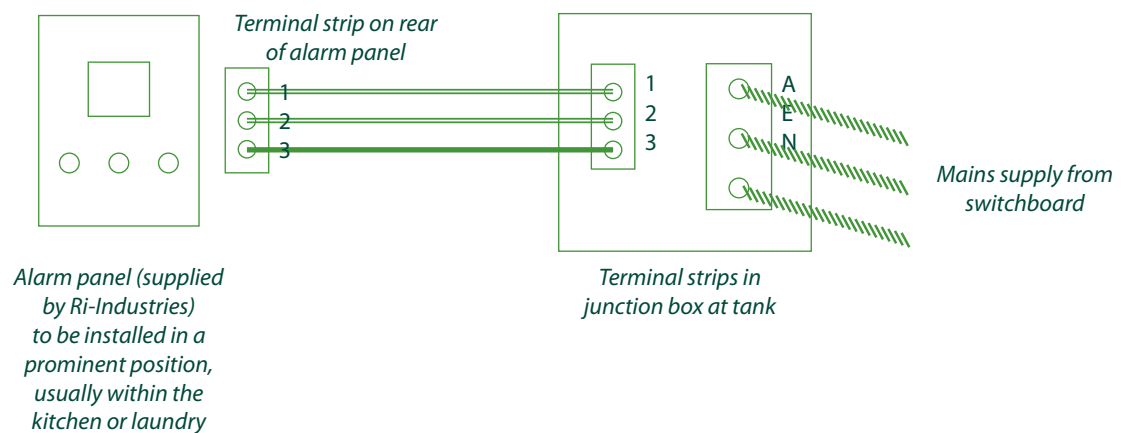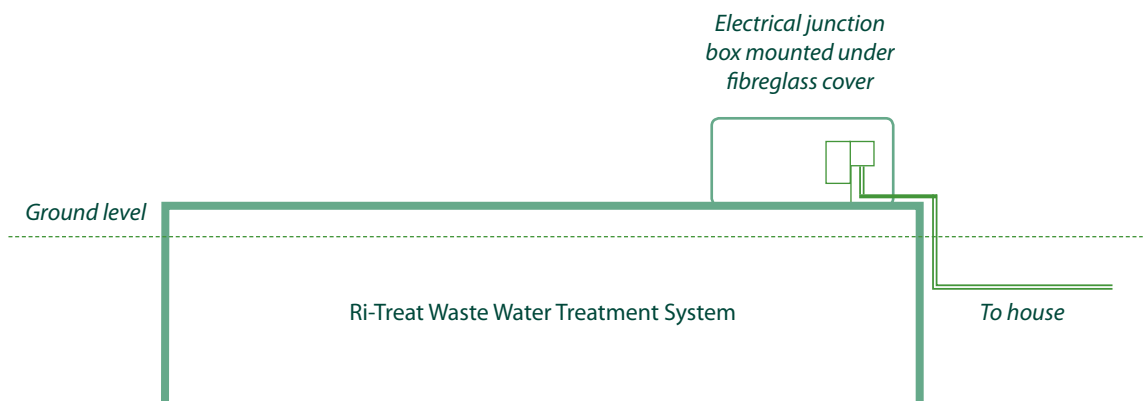

Suitable plants

The list below is a guide to suitable plants for the surface irrigation disposal area. Please note, due to wide climatic and soil variations, you should check with your local plant nursery before finalising your plant choice.

Trees

<i>Botanical name</i>	<i>Common name</i>	<i>Approx. height</i>
Agonis Flexuosa	Willow Myrtle	5 - 6 metres
Acacia Baileyana	Cootamundra Wattle	3 - 5 metres
Banksia Spp.	-	3 - 10 metres
Casuarina Glauca	Swamp Oak	6 - 12 metres
Casuarina Stricta	Drooping She Oak	3 - 5 metres
Casuarina Cunninghiana	River She Oak	6 - 10 metres
Callistemon Viminalis	Red Bottlebrush	3 - 6 metres
Callistemon Salignus	White Bottlebrush	3 - 6 metres
Eucalyptus Robusta	Swamp Mohogany	6 - 9 metres
Eucalyptus Saligna	Sydney Blue Gum	15 - 20 metres
Eucalyptus Grandis	Flooded Gum	10 - 20 metres
Eucalyptus Camaldulensis	River Red Gum	15 - 20 metres
Eucalyptus Cosmophylla	Cup Gum	5 - 6 metres
Hymenosporum Flavum	Native Frangipani	3 - 6 metres
Leptospermum Laevigatum	Coast Tea Tree	5 - 6 metres
Melaleuca Armillaris	Bracelet Honey Myrtle	3 - 4 metres
Malaleuca Quinquenervia	Broad Paperback	5 - 7 metres
Melaleuca Nesophila	Western Tea Myrtle	2 - 4 metres
Pittosporum Spp.	-	2 - 4 metres
Syzygium Paniculatum	Bush Cherry	8 - 10 metres
Tristania Laurina	Kanuka	3 - 5 metres

Shrubs

<i>Botanical name</i>	<i>Common name</i>	<i>Approx. height</i>
Abelia X Grandiflora	Abelia	2 - 3 metres
Acacia Floribund	Gossamer Wattle	2 - 4 metres
Acacia Longifolia	Sallow Wattle	2 - 4 metres
Acacia Iteaphylla	Flinders Range Wattle	2 - 3 metres
Cotoneaster Spp.	-	2 - 4 metres
Cortaderia Selloana	Pampas Grass	2 - 3 metres
Cyperus Alternifolius	Umbrella Grass	0.5 - 1 metre
Cyperus Papyrus	Papyrus	1 - 2 metres
Cassia Spp.	Swamp Mahogany	1 - 3 metres
Chamelaucium Uncinatum	Geraltan Wax	2 - 4 metres
Dryandra Formosa	-	1 - 3 metres
Eremopjhila Spp.	-	1 - 2 metres
Grevillea Spp.	-	1 - 3 metres
Hebe Spp.	Veronica	0.5 - 1 metres
Iris Pseudacorus	Yellow Flag Iris	0.5 - 1 metres
Nerium Oleander	Oleander	2 - 3 metres
Melaleuca Decussata	Cross Leaved Honey Myrtle	1 - 2 metres
Phormium Tenax	New Zealand Flax	2 - 2.5 metres

Perennials / Ground cover

<i>Botanical name</i>	<i>Common name</i>	<i>Approx. height</i>
Aster Novi-gelgii	Perennial Aster	0.5 - 1 metre
Canna	-	1 - 2 metres
Chrysanthemum Frutescens	Marguerite Daisy	1 metre
Chrysanthemum Maximum	Shasta Daisy	1 metre
Gazania Ringens	Black Eyed Susan	0.4 metres
Impatiens Spp.	-	0.4 metres
Salvia Uliginosa	Bog Salvia	0.4 metres
Viola Spp.	-	0.4 metres

Climbers

<i>Botanical name</i>	<i>Common name</i>	<i>Approx. height</i>
Bougainvillea Spp.	-	Variable
Clematis Spp.	-	Variable
Hardenbergia Violacea	Purple Coral Pea	Variable
Hibbertia Scandens	Snake Vine	Variable
Jasminum Grandiflorum	-	Variable
Jasminum Polyanthum	-	Variable
Jasminum Officinale	Common Jasmin	Variable
Kennedia Rubicunda	Dusky Coral Pea	Variable
Lonicera Japonica	Japanese Honeysuckle	Variable
Passiflora Spp.	Passion Flower	Variable
Vitis Coignetiae	Glory Vine	Variable





Industries

**Leaders in pre-cast concrete products
that enhance the environment**

Ri-Industries was established 1947.
We are totally committed to achieving excellence
in all that we do, which is why South Australian
residents and businesses repeatedly buy our
products and regularly recommend us.

www.ri-industries.com.au

618 South Road, Angle Park, South Australia, 5010

P (08) 8444 8100 F (08) 8268 2335

abn 81 007 647 323

